

VARIOUS WORK ZONE EXAMPLES

A clear legible plan of the work area must be provided and include the following:

- Street name(s),
- address of affected property,
- work-zone/skip size and dimensions
- total footpath width (including nature strip),
- length and width of area of footpath unavailable to pedestrians,
- width of remaining footpath available to pedestrians.

Skips/containers must not:

- obstruct pedestrian or vehicle traffic,
- be placed within 10 meters of an intersection,
- be placed in restricted parking areas (other than areas to which timed parking limits apply),
- be placed across a driveway.

All of the above must be supplied in accordance with the examples shown


Please note:

- These examples do not show traffic management signs and a separate traffic management plan in accordance with 1742.3 must be provided, if required,
- where the remaining footpath is less than 1.2 metres, 'Use other footpath' + 'Pedestrians (arrow)' signs must be used, as shown below.

Example 1

Work area encompassing footpath but providing 1.2 metres or greater clear footpath space

19 King William Road
Unley
(ADDRESS)

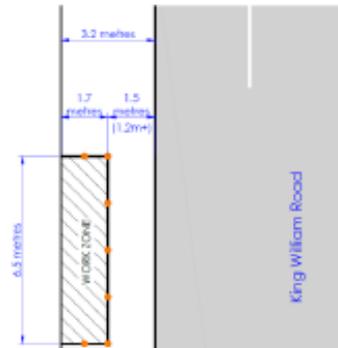


PROPERTY BOUNDARY

Example 2

Work area encompassing footpath but providing less than 1.2 metres of clear footpath space

21 King William Road
Unley
(ADDRESS)

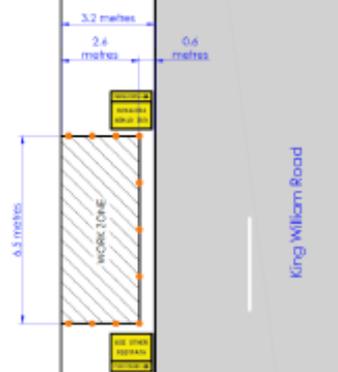


PROPERTY BOUNDARY

Example 3

Work area encompassing footpath and a portion of the road

23 King William Road
Unley
(ADDRESS)

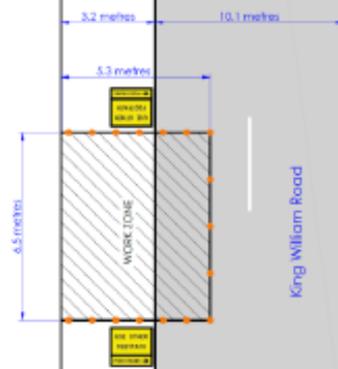

Example 4 Skip on road

